



Sensor-switched LED outdoor light

# GL 60 LED

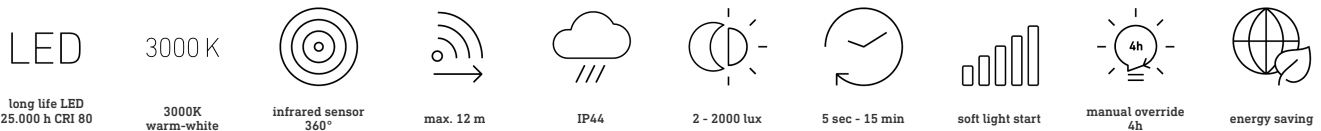

EAN 4007841 007881  
Article number 007881

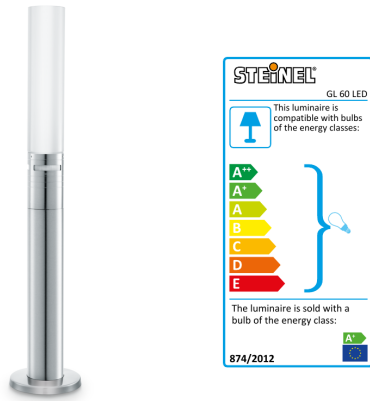

## Function description

Timeless classic with efficient LEDs. Sensor-switched outdoor light STEINEL GL 60 LED, ideal for gardens, drives or pathways. 8,6 W STEINEL LED lighting system, 812 lm, 360° infrared sensor with 12 m reach, including basic light function, soft light start and optional manual override.

## Technical specifications

Mains power supply	230 – 240 V / 50 Hz	Mechanical scalability	No
Sensor Technology	passive infrared	Reach, radial	Ø 12 m (113 m <sup>2</sup> )
Output	8,6 W	Reach, tangential	Ø 24 m (452 m <sup>2</sup> )
Interconnection	No	Photo-cell controller	Yes
Slave mode/selectable	No	Twilight setting	2 – 2000 lx
Luminous flux	812 lm	Time setting	5 s – 15 Min.
Efficiency	94 lm/W	Basic light level function	Yes
Colour temperature	3000 K	Soft light start	Yes
Colour variation LED	SDCM6	Continuous light	selectable, 4h
Farbwiedergabeindex	80-89	Impact resistance	IK03
With lamp	Yes	IP-rating	IP44
Lamp	LED can be replaced	Protection class	II
LED life expectancy (max. °C)	25000 h	Ambient temperature	-20 – 50 °C
Base	E27	Housing material	Stainless steel
LED cooling system	Passive Thermo Control	Cover material	Glass opal
With motion detector	Yes	Manufacturer's Warranty	3 years
Detection angle	360 °	includes sheet of self-adhesive numbers	No
Angle of aperture	30 °	Settings via	Potentiometers
Sneak-by guard	Yes	With remote control	No
Capability of masking out individual segments	Yes	Cover material	shrouds
Electronic scalability	No	PU1, EAN	4007841007881

Sensor-switched LED outdoor light

# GL 60 LED




EAN 4007841 007881  
Article number 007881

## Accessories


EAN 4007841 008321	LED linear lamp for GL 60 LED
EAN 4007841 001346	Replacement glass shade for GL 60 S
EAN 4007841 001339	Replacement electronics unit for GL 60 S

## Detection Zone

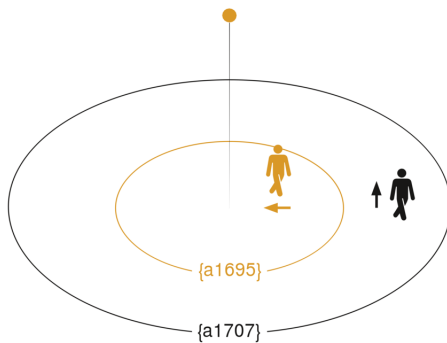

Mögliche Montagehöhe: –  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

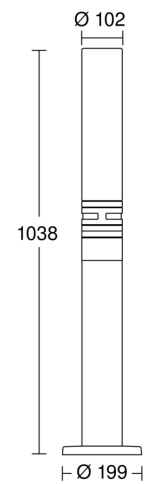

## Circuit diagram

