


RS PRO LED P3 SL

Neutral white

EAN 4007841 056124

Article number 056124



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



IP54



soft light start



connectable with master



energy saving

5 years

 manufacturer's warranty
steinel-professional.de/garantie


CE



ENEC 10



VDE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as slave version without sensor. The RS PRO LED P3 SL integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the master version by cable. Output: 19,5 W with 2310 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	400 x 142 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	19,5 W
Luminous flux	2310 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	No

Photo-cell controller	No
Basic light level function	No
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
With remote control	No
Installation site	wall, ceiling
Version	Neutral white
PU1, EAN	4007841056124

RS PRO LED P3 SL


Neutral white

EAN 4007841 056124


Article number 056124



Dimension Drawing

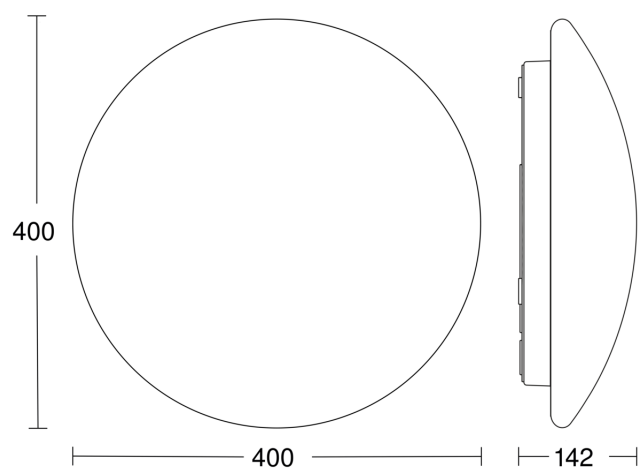


Light Distribution Curve

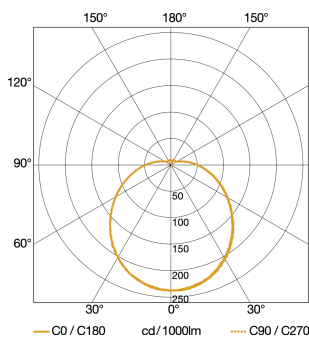

Output	19,5 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	2310 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Master/slave interconnection circuit diagram

