


Sensor-switched LED floodlight - Professional Line

XLED PRO Wide XL

white

EAN 4007841 010041

Article number 010041



manual override
4h



2 - 1000 lux



Panel 360° hor.,
90° ver.



EMC



max. 12 m



CE

4000 K

4000K neutral
white



5 sec - 15 min

LED

30 years (Ø 4,5h /
day)



energy saving

Function description

Full light power. Extra wide. Giving 4400 lm of light, the XLED PRO Wide XL floodlight with 12 m sensor reach, 240° coverage and a mounting height of up to 6 m turns night into day. The STEINEL lens matrix and the fully tilting and turning flat-design light head evenly illuminate rectangular areas. Linear basic light LEDs for more safety and security. Low energy consumption (48 W). With high-quality aluminium heat sink.

XLED PRO Wide XL

white

EAN 4007841 010041

Article number 010041



Technical specifications

| | |
|---|---------------------------|
| Dimensions (L x W x H) | 126 x 265 x 188 mm |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Mounting height max. | 6,00 m |
| Sensor Technology | passive infrared |
| Output | 48 W |
| Interconnection | Yes |
| Type of interconnection | Sensor/slave |
| Interconnection, number | maximum of 10 floodlights |
| Luminous flux | 4400 lm |
| Colour temperature | 4000 K |
| Colour variation LED | SDCM3 |
| Colour Rendering Index | 80-89 |
| With lamp | Yes, STEINEL LED system |
| Lamp | LED cannot be replaced |
| LED life expectancy (max. °C) | 50000 h |
| Drop in luminous flux in accordance with LM80 | L70B10 |
| LED cooling system | Passive Thermo Control |
| With motion detector | Yes |
| Detection angle | 240 ° |
| Angle of aperture | 180 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |

| | |
|---------------------------------|--|
| Reach, radial | r = 5 m (52 m ²) |
| Reach, tangential | r = 12 m (302 m ²) |
| Photo-cell controller | Yes |
| Twilight setting | 2 – 1000 lx |
| Time setting | 5 s – 15 Min. |
| Basic light level function | Yes |
| Basic light level function time | 10 min, 30 min, all night |
| Main light adjustable | No |
| Settings via | Remote control, Potentiometers, Smart Remote |
| Soft light start | No |
| Continuous light | selectable, 4h |
| Impact resistance | IK03 |
| IP-rating | IP54 |
| Protection class | I |
| Ambient temperature | -20 – 40 °C |
| Housing material | Aluminium |
| Cover material | Plastic, transparent |
| Manufacturer's Warranty | 5 years |
| Includes corner wall mount | No |
| PU1, net weight | 1,841 kg |
| Version | white |
| PU1, EAN | 4007841010041 |

Accessories

| | |
|--------------------|--------------------|
| EAN 4007841 007638 | Remote control RC9 |
|--------------------|--------------------|

XLED PRO Wide XL


white

EAN 4007841 010041

Article number 010041



Detection Zone

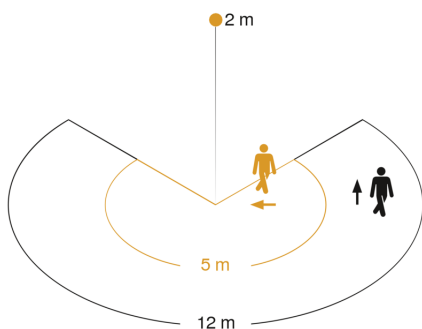


Mögliche Montagehöhe: 1,80 m – 6,00 m


Orange: radial

Schwarz: tangential

Dimension Drawing

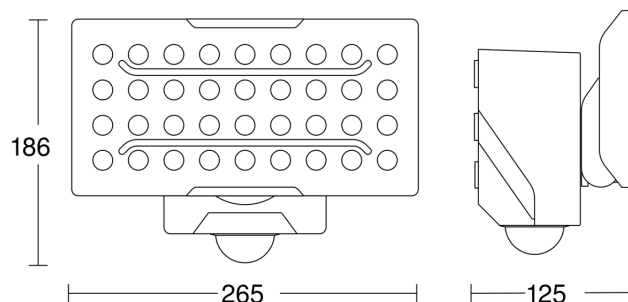


Light Distribution Curve



| | |
|-------------------------------|-------------------------|
| Output | 48 W |
| With lamp | Yes, STEINEL LED system |
| Lamp | LED cannot be replaced |
| Luminous flux | 4400 lm |
| Colour temperature | 4000 K |
| Colour Rendering Index | 80-89 |
| LED life expectancy (max. °C) | 50000 h |
| LED cooling system | Passive Thermo Control |

Master circuit diagram



XLED PRO Wide XL

white

EAN 4007841 010041

Article number 010041



Master/slave and master/master interconnection circuit diagram

