


LED indoor light without sensor - Professional Line

RS PRO LED P1 SL

V3 warm white

EAN

Article number



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



IP54



soft light start



connectable with master



energy saving

5 years

manufacturer's warranty
steinel-professional.de/garantie



CE



ENEC 05



VDE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as slave version without sensor. The RS PRO LED P1 SL integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the master version by cable. Output: 9 W with 960 lm, 3000 K.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	9 W
Luminous flux	960 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L80B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	No

Photo-cell controller	No
Basic light level function	No
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	10 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
With remote control	No
Installation site	wall, ceiling
Version	warm white

RS PRO LED P1 SL


V3 warm white

EAN


Article number



Dimension Drawing

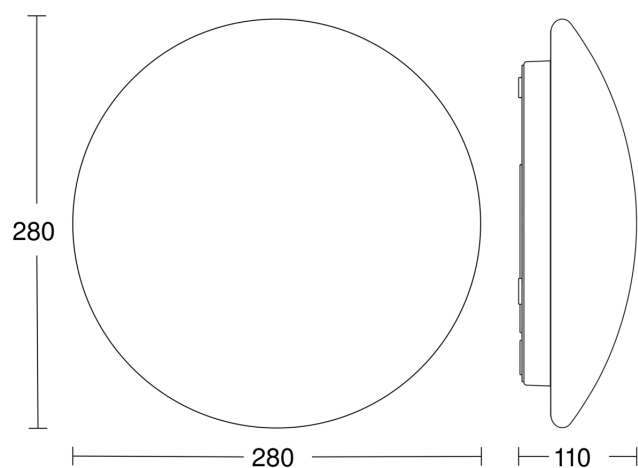


Light Distribution Curve



Output	9 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	960 lm
Colour temperature	3000 K
Colour Rendering Index	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Master/slave interconnection circuit diagram

