


Sensor-switched outdoor light

L 560 S

black
 EAN 4007841 634216
 Article number 634216



Max. 60 W									3 years
max. 60 W E27	infrared sensor 140°	max. 12 m	IP44	Sensor 90° ver., 180° hor.	2 - 2000 lux	8 sec - 35 min	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

Function description

Classic globe design. Outdoor SensorLight L 560 S, ideal for building fronts and entrances, 140° angle of coverage, reach up to 12 m, selectable time and twilight threshold, sensor tilts through 65° and turns through 130° for exact adjustment of the detection zone.

Technical specifications

Dimensions (L x W x H)	243 x 215 x 368 mm
Mains power supply	230 – 240 V / 50 Hz
Mounting height max.	3,00 m
Sensor Technology	passive infrared
Output	60 W
Interconnection	No
Slave mode/selectable	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	140 °
Sneak-by guard	No
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 5 m (31 m ²)
Reach, tangential	r = 12 m (176 m ²)

Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Cover material	sticker
Version	black
PU1, EAN	4007841634216

Sensor-switched outdoor light

L 560 S


black
EAN 4007841 634216
Article number 634216



Accessories

EAN 4007841 003548 Replacement glass shade for L 70X/590/535/560/585

Detection Zone

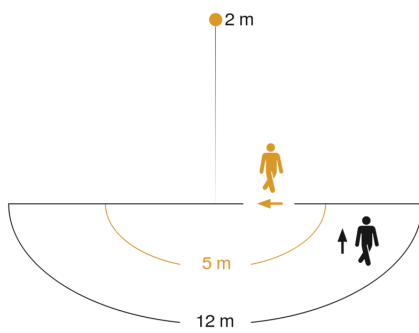

Mögliche Montagehöhe: 1,80 m – 3,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

