

IR Micro

LiveLink

EAN 4007841 009748



Infrared sensor
max. 4 x 4m
presence



2 - 1000 lux



30 sec - 30 min



ideal 2,5 - 4 m

TEACH

Teach mode



iQ-mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
steinel-professional.de/garantie



CE

Function description

Small. Round. Slim. Compact, inconspicuous single workstation solution. IR Micro LiveLink 360° passive infrared sensor with a presence detection zone of 4 x 4 m (presence and radial) or 6 x 6 m (tangential). Easy step-by-step configuration via LiveLink app. With patented multi-segment pyro sensor and eight user-friendly functions. Max. mounting height: 2.8 m. Colour finish: white.

Technical specifications


Type	Presence detector	Reach, presence	4 x 4 m (16 m ²)
Dimensions (Ø x H)	80 x 21 mm	Twilight setting TEACH	Yes
Power supply, detail	DALI bus	Twilight setting	2 – 2000 lx
Number of Dali users	2	Time setting	60 s – 60 min
Sensor Technology	passive infrared	Control output, Dali	Addressable/slave
Application, place	Indoors	LiveLink values	Light level, Motion detection
Application, place, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors	Constant-lighting control	Yes
Installation site	ceiling	Basic light level function	No
Installation	Concealed wiring	Settings via	LiveLink app
Switching zones	168 switching zones	With remote control	No
Electronic scalability	No	Interconnection	Yes
Mechanical scalability	No	IP-rating	IP20
Mounting height	2,00 – 5,00 m	Material	Plastic
Optimum mounting height	2,8 m	Ambient temperature	0 – 40 °C
Detection angle	360 °	Colour	white
Angle of aperture	160 °	Colour, RAL	9003
Sneak-by guard	Yes	Manufacturer's Warranty	5 years
Reach, radial	4 x 4 m (16 m ²)	Version	LiveLink
Reach, tangential	6 x 6 m (36 m ²)	PU1, EAN	4007841009748

IR Micro

LiveLink

EAN 4007841 009748

Detection Zone

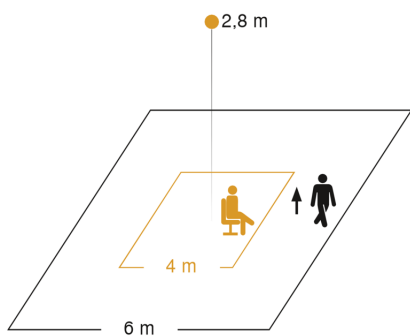

Mögliche Montagehöhe: 2,00 m – 5,00 m

Orange: Präsenz

Schwarz: tangential

Dimension Drawing

